


CP603145: Thin Cell

Technical Datasheet

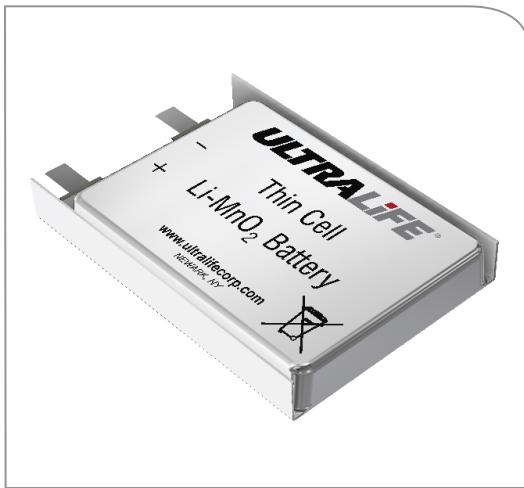


Technical Specifications

Part No	CP603145
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Manganese Dioxide
Voltage Range	1.5V to 3.3V
Nominal Voltage	3.0V
Typical Capacity at 5mA	1900mAh to 2.0V @ +23°C
Max. Continuous Discharge	500mA
Max. Pulse Discharge¹	Up to 1000mA (life and temperature dependent)
Energy Rating	5700mWh
Energy Density	
Gravimetric	363Wh/kg
Volumetric	Pending
Weight	15.7g
Lithium Metal Content	0.57g
Operating Temperature	-20°C to +80°C
Storage Temperature²	-40°C to +80°C
Humidity	65±20%RH
Exterior/Housing	Laminated aluminium foil
Terminals/Connector	Ni-stainless steel tabs (Ni-Ni optional)
Size (maximums)	Length: 45.0mm Width: 31.0mm Height: 6.2mm
Certifications	UL 1642 UN 38.3
Safety	AL/MSDS-RD-004
Transportation³	Excepted Dangerous Goods UN3091: Packed with or contained in equipment Air Shipment: Packing Instruction 969 or 970, Section II UN3090: Bulk shipment Air shipment: Packing Instruction 968, Section II
Quality Assurance	Ultralife manufacturing facilities are ISO 9001:2008 and ISO 14001:2004 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.

Notes

1. Varies according to pulse characteristics, temperature, cell history and the application. Consult with Ultralife.
2. For a >5 years life, storage should not exceed +30°C.

Dimensions

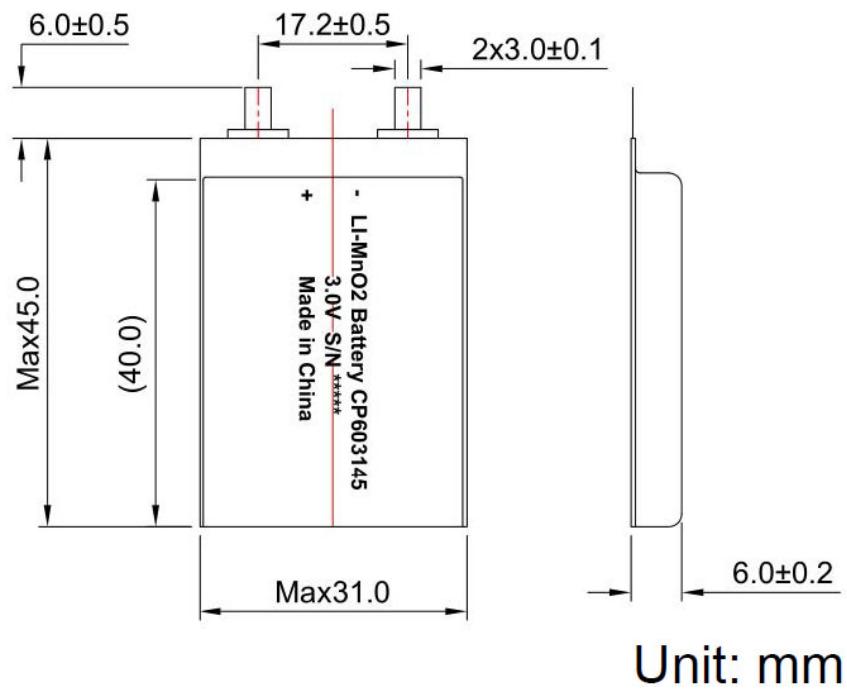

Performance Graphs

