

# CP602629: Thin Cell®

## Technical Datasheet




### Technical Specifications

Part No	CP602629
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Manganese Dioxide
Voltage Range	1.5V to 3.3V
Nominal Voltage	3.0V
Typical Capacity at 10mA	850mAh to 1.5V @ +23°C
Max. Continuous Discharge	150mA
Max. Pulse Discharge <sup>1</sup>	Up to 300mA (life and temperature dependent)
Energy Rating	2550mWh
Weight	6.5g
Operating Temperature	-20°C to +60°C
Storage Temperature <sup>2</sup>	-40°C to +60°C
Humidity	65±20%RH
Exterior/Housing	Laminated aluminium foil
Terminals/Connector	Connector: Molex 78172-0002 Terminal: Molex 78172-0411
Size (maximums)	Length: 28.5mm Width: 26.0mm Height: 6.2mm
Certifications	UL 1642 UN 38.3
Safety	AL/MSDS-RD-004
Transportation	UN 3090 Dangerous Goods Class 9, Lithium Content >0.3g, <1.0g If packed in or with equipment (UN 3091), contact Ultralife for guidance or other questions.
Quality Assurance	Ultralife manufacturing facilities are ISO 9001 and ISO 13485 registered. Its products are listed under the Component Recognition Program of Underwriters Laboratories (UL) and have passed UN transportation testing, which is required for international transportation of all lithium batteries.

### Notes

- Varies according to pulse characteristics, temperature, cell history and the application.  
Consult with Ultralife.
- For a >5 years life, storage should not exceed +30°C.

## Dimensions

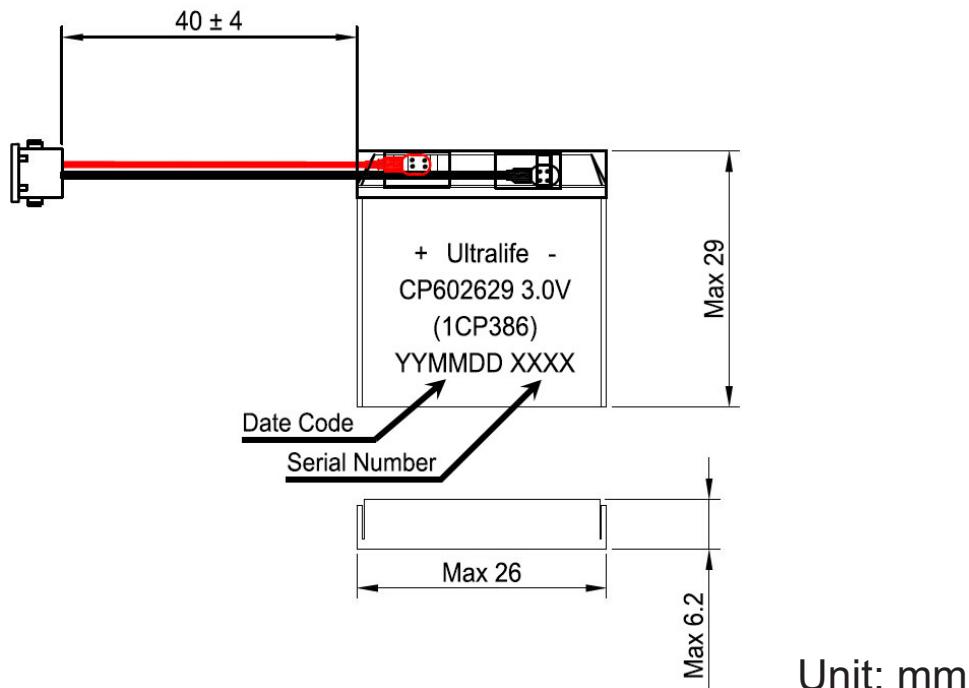

## Performance Graphs

