

UAD0012

Technical Datasheet



Technical Specifications

Part No.	UAD0012
NSN	5935-01-729-0437
Material	Body: Aluminum alloy Contact: Copper alloy Insulation: Resilient rubber
Finish	Body: Olive drab per QQ-P-416 Contact: Gold plate per MIL-G-45204
Contacts	Number of pins: 6 Size: 16 GA PIN
Compatible Batteries	UBBL02-01 UBBL02-01-CB UBBL09-01 UBBL10-01 UBBL10-01-CB UBBL13-01 UBBL13-01-CB
Note	Package quantities: Multiples of 10

Features

- Secure four-screw panel mounting
- Easy connection through solder cup interconnect
- Lightweight aluminum housing
- Gold plated contacts


Benefits

- Provides fixed mounting option for connection to battery

Applications

- For use with rechargeable XX90 battery series

Dimensions

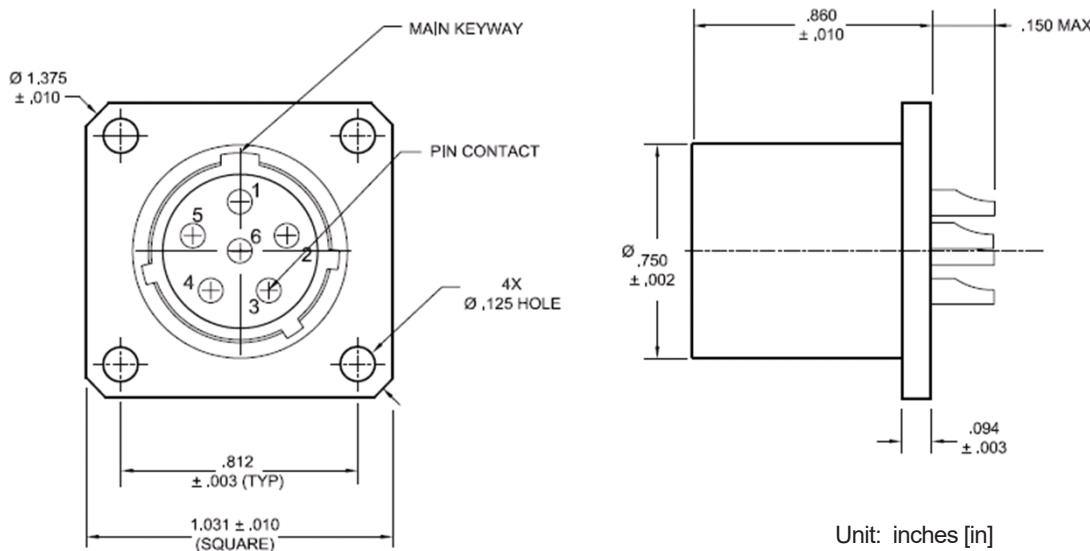

Unit: inches [in]

UAD0012

Newark, New York | 315-332-7100 | Fax: 315-331-7800

©2025 Ultralife Corporation • www.ultralifecorp.com • All specific subject to change without notice.

The information contained herein is for reference only and does not constitute a warrant of performance. • 17 JUN 25 UBM-05233 Rev B