


UCA0102-XX

Technical Datasheet

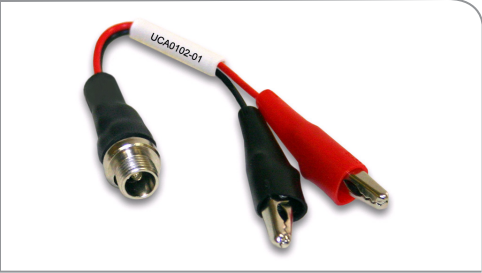

Technical Specifications	
Part No.	UCA0102-01, UCA0102-02, UCA01012-03
Conductor Gauge	20AWG
Current Rating	5.0A max.
Temperature Rating	0°C to 45°C
Length	UCA0102-01: 13.5cm (5.3in) UCA0102-02: 12.5cm (4.9in) UCA0102-03: 12.5cm (4.9in)
Termination	Input: Switchcraft 712A Output: UCA0102-01: Alligator clips UCA0102-02: JST B2P-VH-FB-B UCA0102-03: MOLEX 0022-23-2031
Weight	UCA0102-01: 10g (0.35oz) UCA0102-02: 8g (0.28oz) UCA0102-03: 8g (0.28oz)
Note	For engineering evaluation only. For production option contact Ultralife Corporation.

Applications

- UCA0102-01: Interface charge cable for standard pack batteries UBBL19-FL to UBBL26-FL
- UCA0102-02: Interface charge cable for standard pack batteries UBBL19-C1 to UBBL26-C1
- UCA0102-03: Interface charge cable for standard pack battery UBBL24-C2-TH