

UHR-ER26500-X2: C size spiral cell (Generation X2)

Technical Datasheet



HiRate™


Technical Specifications

Part No	UHR-ER26500-X2
Model No	ER26500M-X2
Cell Type	Primary, non-rechargeable
Chemistry	Lithium Thionyl Chloride
Voltage CCV	3.4 to 3.0V (temperature and load dependent)
Open Circuit Voltage	3.65V
Nominal Capacity at 2mA	6.0Ah to 2.0V @ +23°C
Min. Cut-off Voltage	2.0V
Max. Constant Discharge Current	1000mA
Pulse Capability¹	Typically up to 2000mA (2000mA/0.1 second pulses, drained every 2 min at +20°C)
Weight	60g
Lithium Metal Content	1.6g
Operating Temperature²	-55°C to +85°C ³
Storage Temperature	+30°C max., store at ≤ 20°C to minimize passivation and self-discharge
Exterior/Housing	304 stainless steel
Terminals/Connector	Button cap, radial tabs, radial pins, axial leads, flying leads
Safety	UL 1642 - pending UN 38.3 (transportation) (technician replaceable)
Transportation	UN 3090 Dangerous Goods Class 9, Lithium Content >1.0 g, <5.0 g If packed in or with equipment (UN 3091), contact Ultralife for guidance or other questions.

Note(s)

1. Varies according to pulse characteristics, temperature, cell history and the application. Consult Ultralife for exact performance under your pulse load.
2. Operation at extreme ranges (temperature or current) may lead to reduced capacity and lower voltage readings at beginning of pulses. Consult with Ultralife for your application.
3. Exceeding the maximum temperature rating of +85°C may cause cell leaks, excessive expansion of case hardware, and / or decomposition of case shrink wrap.

Dimensions

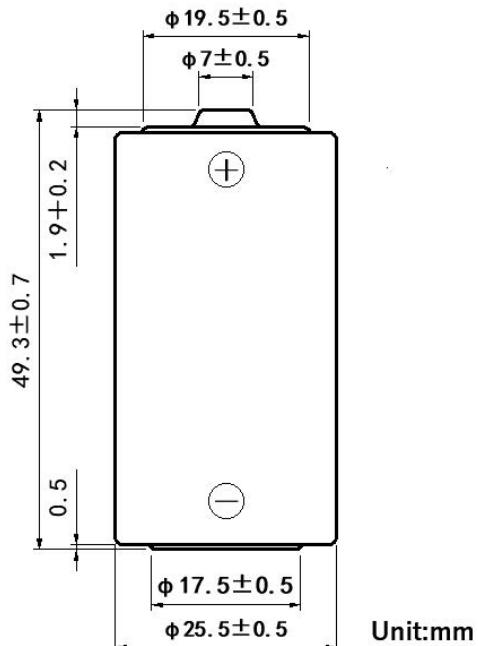

Performance Graphs

