

3B5700

High Rate 1/2 AA Cell


Lithium Sulfuryl Chloride

Electrochem PMX150 Series

Physical Characteristics

Cell Drawing


Chemistry	Sulfuryl Chloride
Construction	Spiral
Cell Size	1/2 AA
Length¹	30.0 mm
Diameter²	13.7 mm
Cell Weight	8.3 g
Lithium Weight	0.3 g
Integrated Safety Fuse	Yes

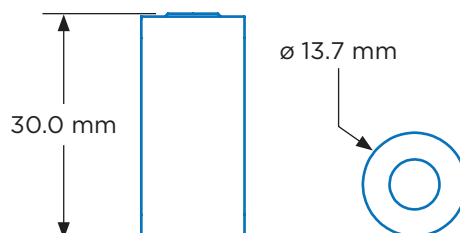

Electrical Characteristics

Discharge Curve
20 mA, 120°C

Cell Type	Primary
Open Circuit Voltage (25°C)	3.93 V
Nominal Capacity	0.90 Ah
Maximum Continuous Current	150 mA
Operating Temperature	-20°C to +150°C
Self Discharge Rate	<3% per year
Storage Temperature	≤ 25°C
Discharge Condition	20 mA, 120°C

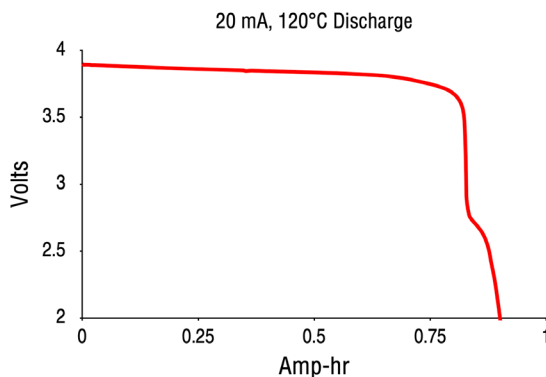

Key Features

- Primary chemistry (non-rechargeable)
- High rate capability
- Advanced spiral-wound technology
- Stainless steel container
- Hermetic glass-to-metal sealing
- Custom terminations available

Main Applications³

- Military communications
- Oceanographic buoys and gliders
- Tracking systems
- Sensor systems
- Pipeline inspection gauges
- Beacons, transponders and receivers
- Seismic surveying birds

NOTE: ¹ The information on this datasheet is for marketing purposes only. Please consult with Electrochem for more information regarding how our cells will perform within your application. ² The information in this document is subject to change without notice and does not constitute a warranty of performance. ³ This product and its external electrical contact materials are RoHS compliant. See our "RoHS Statement" for more information. ⁴ The length dimension was based off of a flat termination. The use of other terminations will impact overall cell length. ⁵ Diameter measurements include shrink when applicable. ⁶ The "Main Application" list does not include all potential applications, please consult Electrochem for your application needs.