

# 4230

## Low Rate AA Cell


### Lithium Thionyl Chloride

## Electrochem 200LR Series

### Physical Characteristics

|                               |                  |
|-------------------------------|------------------|
| <b>Chemistry</b>              | Thionyl Chloride |
| <b>Construction</b>           | Bobbin           |
| <b>Cell Size</b>              | AA               |
| <b>Length<sup>1</sup></b>     | 50.3 mm          |
| <b>Diameter<sup>2</sup></b>   | 13.5 mm          |
| <b>Cell Weight</b>            | 16.8 g           |
| <b>Lithium Weight</b>         | 0.7 g            |
| <b>Integrated Safety Fuse</b> | N/A              |


Cell Drawing

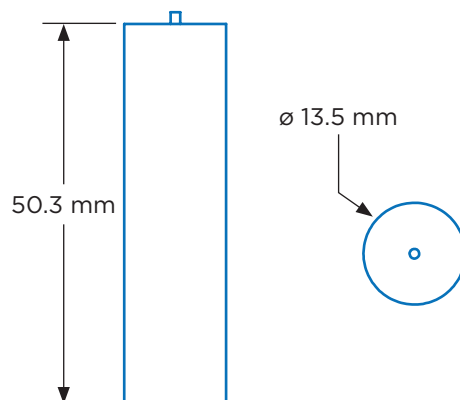

### Electrical Characteristics

|                                    |                 |
|------------------------------------|-----------------|
| <b>Cell Type</b>                   | Primary         |
| <b>Open Circuit Voltage (25°C)</b> | 3.67 V          |
| <b>Nominal Capacity</b>            | 1.4 Ah          |
| <b>Maximum Continuous Current</b>  | 20 mA           |
| <b>Operating Temperature</b>       | +70°C to +200°C |
| <b>Self Discharge Rate</b>         | <2% per year    |
| <b>Storage Temperature</b>         | ≤ 25°C          |
| <b>Discharge Condition</b>         | 10 mA, 150°C    |

Discharge Curve  
10 mA, 150°C

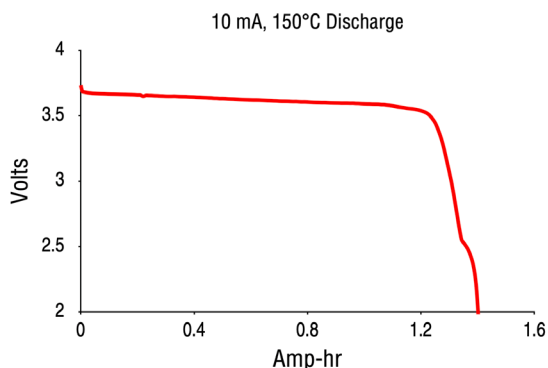

### Key Features

- Primary chemistry (non-rechargeable)
- Low rate capability
- Bobbin style construction
- Stainless steel container
- Hermetic glass-to-metal sealing
- Custom terminations available

### Main Applications<sup>3</sup>

- Memory back-up
- Animal telemetry
- Low current downhole oil and gas

NOTE: <sup>1</sup> The information on this datasheet is for marketing purposes only. Please consult with Electrochem for more information regarding how our cells will perform within your application. <sup>2</sup> The information in this document is subject to change without notice and does not constitute a warranty of performance. <sup>3</sup> This product and its external electrical contact materials are RoHS compliant. See our "RoHS Statement" for more information. <sup>4</sup> The length dimension was based off of a flat termination. The use of other terminations will impact overall cell length. <sup>5</sup> Diameter measurements include shrink when applicable. <sup>6</sup> The "Main Application" list does not include all potential applications, please consult Electrochem for your application needs.