

### LITHIUM THIONYL CHLORIDE CELL

#### Technical Overview

|                             |                     |
|-----------------------------|---------------------|
| Open Circuit Voltage (25°C) | 3.67 V              |
| Rated Discharge Current     | 30 mA               |
| Rated Capacity              | 6.0 Ah              |
| Maximum Continuous Current  | 30 mA               |
| Cell Diameter (nominal)     | 21.0 mm             |
| Cell Length (nominal)       | 101.6 mm            |
| Cell Weight                 | 69.2 g              |
| Lithium Weight              | 2.4 g               |
| Self Discharge              | 2% per year at 25°C |
| Operating Temperature       | +70°C to +200°C     |
|                             | +158°F to +392°F    |

#### Key Features:


- Primary chemistry (non-rechargeable)
- Low rate capability
- Bobbin style construction
- Stainless steel container
- Hermetic glass-to-metal sealing
- Wide operating temperature range as low as +70°C and up to +200°C
- Low self discharge rate (2% per year at 25°C)
- Restriction for transportation (Class 9)
- Custom terminations available

#### Main Applications:

- Memory back-up
- Animal telemetry
- Low current downhole oil and gas

NOTE: This list does not include all potential applications, please consult Electrochem for your specific application needs.

#### Discharge at 30 mA, 150°C

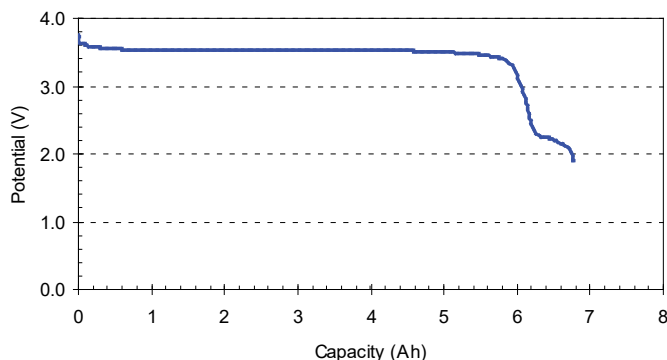

NOTICE: The information on this datasheet is for single cells only. Please consult with Electrochem if you are interested in additional information. The information in this document is subject to change without notice and does not constitute a warranty of performance.