

The logo features the word "ULTRA" in a bold, italicized, white sans-serif font. This is followed by "LiFE" in a similar italicized font, but with a red square dotting the "i" and a registered trademark symbol (®) at the end. The background is dark grey with a grid of squares that fade out towards the top right.

ULTRALiFE®

2EXL7574

7.2V 3.0Ah Li-ion Battery Assembly

File ID	Author	Approval	Circulation	Release Date	Pack ID	Page	Rev
SP-2EXL7574-Rev-AA	J. Lapeña	M. MacWillie	Sales	2022-03-28	2EXL7574	1/6	AA

Part Number: 2EXL7574

Key Features:

- Samsung INR18650-30Q cells
- Integrated protection circuit ensures operation with safe limits 2S2P configuration
- With 10k NTC thermistor lead
- Molex Nano-Fit 1053071203 connector
- Designed to meet IEC 32133 and UL 2054

Regulatory Approvals:

- UN 38.3

Electrical Characteristics:

Nominal Voltage	7.2V
Capacity (Typical, @ 25C)	6000mAh
Capacity (Minimum @ 1200mA, 5.0V cut-off, 25C)	5900mAh
Energy (Typical, @ 25C)	43.20Wh
Voltage Range	5.0V – 8.4V
Continuous Charge Current (Standard @ 25C)	3A
Continuous Charge Current (Max @ 25C)	3A
Continuous Discharge Current (Max @ 25C) Charge	3A
Termination Current	300mA
Thermistor Manufacturer Part Number	NCP15XH103F03RC
Thermistor Nominal Resistance (@ 25C)	10K
Thermistor BConstant(25/85C)	3434K

Mechanical Characteristics:

Dimensions	Length (Typical)	66.250 mm
	Width (Typical)	37.378 mm
	Thickness (Typical)	38.142 mm

Environmental Characteristics:

Charge Temperature (Ambient)	0C to +45C
Discharge Temperature (Ambient *Note 1)	-20C to 60C
Storage Temperature (Ambient, @30% SOC *Note2)	0C to 23C (1 year)
	0C to 45C (3 months)
	0C to 60C (1 months)

Note 1: Maximum cell surface temperature = 70C. Maximum surface temperature is defined as the point in the pack where the cell surface temperature is the highest.

Note 2: Capacity recovery > 80% for all specified storage conditions if stored at 30% state of charge.

File ID	Author	Approval	Circulation	Release Date	Pack ID	Page	Rev
SP-2EXL7574-Rev-AA	J. Lapeña	M. MacWillie	Sales	2022-03-28	2EXL7574	2/6	AA

Serialization:

Packs will be serialized per Excell's standard serialization format BYZZZNNNN where:

- B = Excell Battery branch
 - 1 = Surrey
 - 2 = Mississauga
 - 3 = Calgary
 - 4 = Houston
- YY = The last two digits of the current year
- ZZZ = The day of the year the serial batch was created
- NNNN = Incremental number within the serial batch

For example, the first battery in a batch produced in Mississauga on February 11, 2021 would be:
2210420001.

Labelling:

Packs will have the following labels affixed to the surface of the battery:



Rechargeable Li-Ion Battery

Volt. : 7.2 V Cap. : 6.0 Ah Watthr. : 43.2 Wh **Li-ion**

EBCPN 2EXL7574

WARNING: FIRE, EXPLOSION, AND SEVERE BURN HAZARD, DO NOT
SHORT CIRCUIT, FORCE OVERDISCHARGE, FORCE OVERCHARGE,
DISASSEMBLE, CRUSH, OR PENETRATE, BATTERY MAY LEAK
OR EXPLODE IF HEATED ABOVE RATED TEMPERATURE.
Must be disposed of as per local environmental or waste regulations.

Assembled in Canada




1234567890

MFG Date: 2021-05-19

File ID	Author	Approval	Circulation	Release Date	Pack ID	Page	Rev
SP-2EXL7574-Rev-AA	J. Lapeña	M. MacWillie	Sales	2022-03-28	2EXL7574	3/6	AA

Pack Drawing:

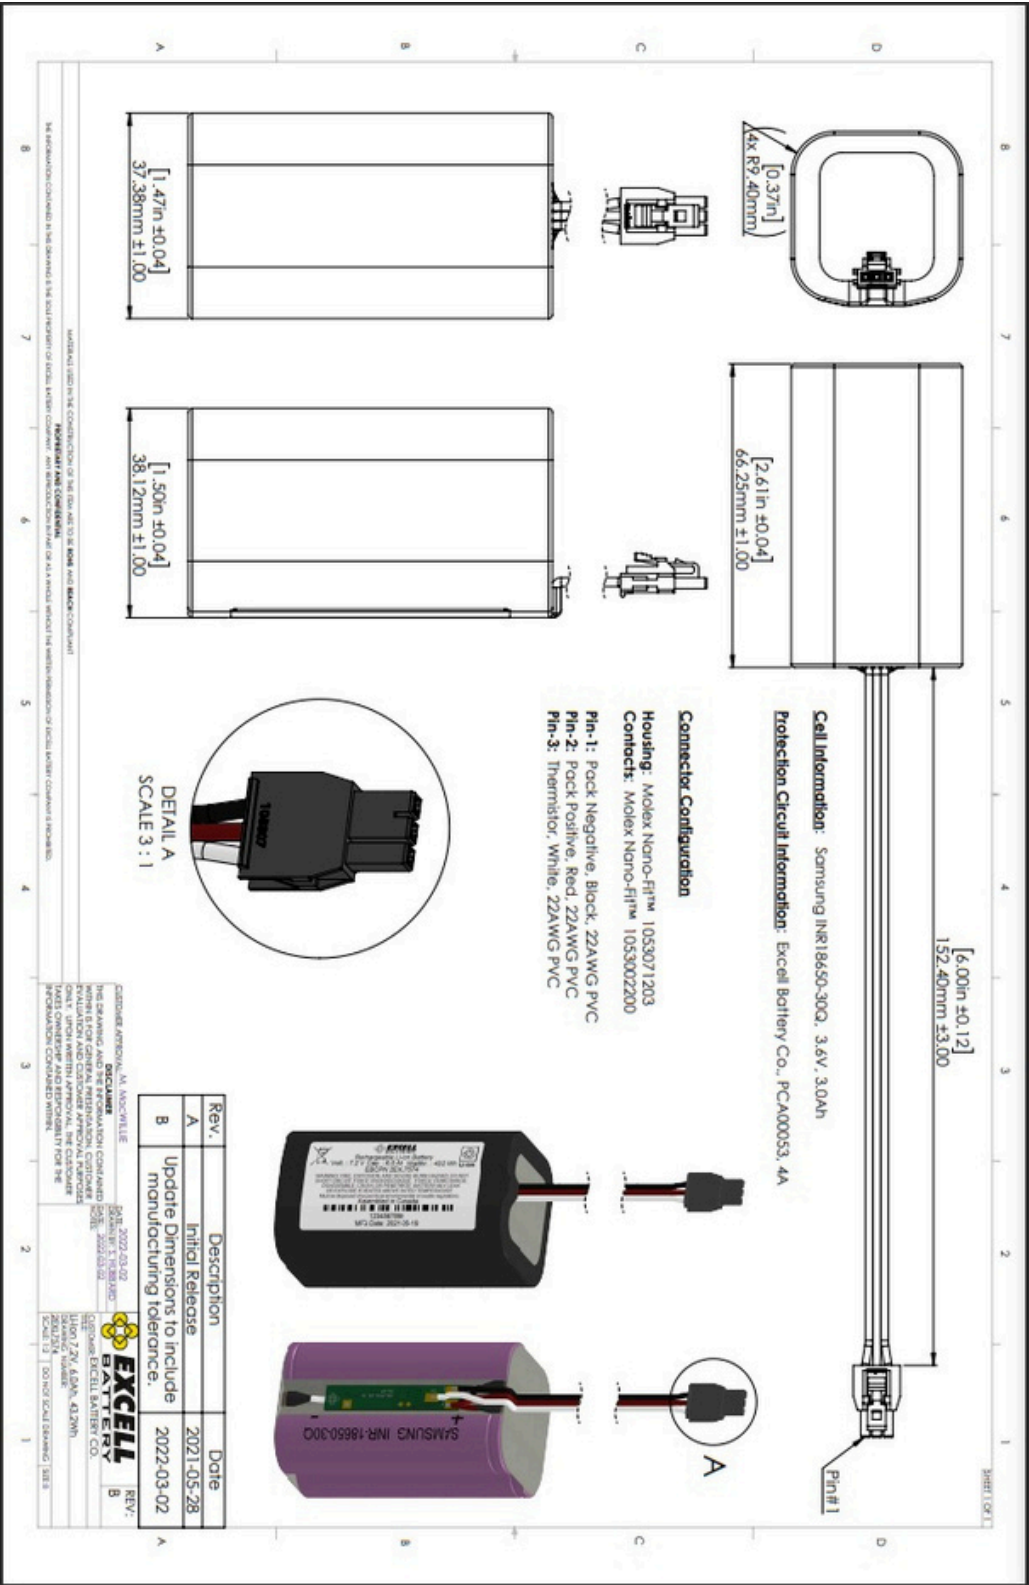

File ID	Author	Approval	Circulation	Release Date	Pack ID	Page	Rev
SP-2EXL7574-Rev-AA	J. Lapeña	M. MacWillie	Sales	2022-03-28	2EXL7574	4/6	AA

Protection Circuit Thresholds:

Parameter	Min.	Typ.	Max.	Unit
Maximum Recommended Constant Operating Current		4.000		A
Overdischarge Detection Voltage	2.350	2.400	2.450	V
Overdischarge Release Voltage	2.800	2.900	3.000	V
Overdischarge Detection Delay	102.400	128.000	153.600	ms
Overdischarge Release Delay		n/a		ms
Overcharge Detection Voltage	4.205	4.225	4.245	V
Overcharge Release Voltage	4.045	4.075	4.105	V
Overcharge Detection Delay	0.800	1.000	1.200	S
Overcharge Release Delay Time		n/a		ms
Discharge Overcurrent Threshold	4.000	4.750	5.560	A
Discharge Overcurrent Delay	6.400	8.000	9.600	ms
Discharge Overcurrent Release Delay		n/a		S
Charge Overcurrent Threshold	4.000	4.750	5.560	A
Charge Overcurrent Delay	6.400	8.000	9.600	ms
Charge Overcurrent Release Delay		n/a		S
Short Circuit Detection Threshold	18.000	23.500	28.600	A
Short Circuit Detection Delay	224.000	280.000	336.000	us
Redundant Safety Fuse		6.000		A
Operating Ambient Temperature	-40.000		85.000	°C
Storage Temperature	-40.000		125.000	°C

File ID	Author	Approval	Circulation	Release Date	Pack ID	Page	Rev
SP-2EXL7574-Rev-AA	J. Lapeña	M. MacWillie	Sales	2022-03-28	2EXL7574	5/6	AA

Cell Specification:

2. Description and model

2.1 Description	lithium-ion rechargeable cell
2.2 Model name	INR18650-30Q
2.3 Site	Manufactured in Korea, Malaysia & China

3. Nominal specifications (*1)

Item	Specification
3.1 Standard discharge capacity	Min. 2,950mAh - Charge: 0.5C(1.5A), 4.20V, 0.02C(150mA) cut-off @ RT - Discharge: 0.2C(600mA), 2.5V cut-off @ RT * 1C = 3,000mA
3.2 Rated discharge capacity	Min. 2,900mAh - Charge: 4A, 4.20V, CCCV 100mA cut-off @ RT - Discharge: 10A , 2.5V cut-off @ RT
3.3 Nominal voltage	3.6V
3.4 Standard charge	CCCV, 1.5A, 4.20V, 150mA cut-off
3.5 Rated charge	CCCV, 4A, 4.20V, 100mA cut-off
3.6 Charging time	Standard charge : 132min / 150mA cut-off (@ RT) Rated charge: 60min / 100mA cut-off (@ RT)
3.7 Max. continuous discharge	15A (@ RT)
3.8 Discharge cut-off voltage	2.5V (End of discharge)
3.9 Cycle life	Capacity $\geq$ 1,770mAh @ after 250cycles (60% of the standard capacity @ RT) - Charge : 1.5A, 4.20V, CCCV 150mA cut-off @ RT - Discharge: 15A , 2.5V cut-off @ RT
3.10 Storage characteristics	Capacity recovery(after the storage) $\geq$ 2,320mAh (80% of the rated capacity @ RT) - Charge : 4A, 4.20V, CCCV 100mA cut-off @ RT - Storage : 30 days (@ 60℃) - Discharge : 10A , 2.5V cut-off @ RT
3.11 Cell weight	48.0g max
3.12 Cell dimension	Height : Max. 65.00 mm Diameter : Max. 18.40 mm
3.13 Operating temperature(*2)	Charge : 0 to 45℃ (Ambient) Discharge: -20 to 60℃ (Ambient)
3.14 Storage temperature(*3)	1 year 0~23℃ 3 months 0~45℃ 1 month 0~60℃

File ID	Author	Approval	Circulation	Release Date	Pack ID	Page	Rev
SP-2EXL7574-Rev-AA	J. Lapeña	M. MacWillie	Sales	2022-03-28	2EXL7574	6/6	AA

Revisions:

Revision	Date	Description of Change	DQP / ECO #	Approval
AA	2022-03-28	Initial Release	DQP-M21-46	M. MacWillie