

UBI-2590 / SMBus Commercial Label

Technical Datasheet

WE. ARE. CRITICAL. POWER.™



Technical Specifications

Part No.	UBBL10-01-CB	
IEC Designation	4INR19/66-3	
Voltage Range	30V Mode:	20.0 to 33.6V
	15V Mode:	10.0 to 16.8V
Average Voltage	30V Mode:	28.8V
	15V Mode:	14.4V
Capacity	Nominal ¹	30V mode: 8.7Ah
		15V mode: 17.4Ah
	Minimal ¹ :	30V mode: 8.2Ah
		15V mode: 16.5Ah
Max. Continuous Discharge	30V Mode:	10.0A
	15V Mode:	20.0A
Max. Pulse Discharge ²	30V Mode:	18.0A
	15V Mode:	36.0A
Energy ¹	250Wh	
Energy Density	190Wh/kg, 296Wh/l	
Weight	1350g, 3.0lbs	
Cycle Life ³	> 300 cycles	
Operating Temperature	-32°C to +60°C discharging, -20°C to +50°C charging	
Storage Temperature	-20°C to +50°C	
Self-Discharge @ +23°C	<5% per month	
Exterior/Housing	Hard plastic (Noryl N190X-701)	
Color	Standard color is Desert Tan. Available in black by phone order only.	
Terminals/Connector	Connector SC-C-179495	
Communications	Physical layer:	SMBus v1.1
	Protocol:	SBD v1.1 compliant
State of Charge Indicator	5-segment LCD display (both sides)	
Harmonized Tariff Schedule	8507.60.0000	
Protection	Over Voltage:	4.30V (per cell)
	Under Voltage:	2.40V (per cell)
	Transient Currents:	23.0A > 15ms
		30.0A > 305us
	Short Circuit	
	Overcharge Protection:	Up to 40V
	Thermal Cutoff Device:	Activates 70±5°C
		Resets 50±5°C
	Thermal Fuse:	Activates 93±5°C
Charging	Connect each side of the battery to a DC power source using correct polarity and apply a maximum voltage of 16.8V. Limit the current to the recommended rate of 3.0A and hold to 16.8V until the current declines to 300mA. Maximum charge rate is 4.8A.	
Safety	Material Safety Datasheet - MSDS041 Refer also to Safety Guide UBM-5112	
Certifications	IEC 62133-2(2017) UL/CSA 62133 CB scheme (ID: BE-39562)	
Transportation	UN 3480 Dangerous Goods Class 9, Total Energy >100Wh, <300Wh. If packed in or with equipment (UN 3481) contact Ultralife for guidance or other questions. UN Testing Summary - UNTS-0031A	
Harmonized Tariff Schedule	8507.60.0000	
Notes	1. Using a C/5 discharge rate at +25°C. 2. Load has a pulse width of 5 seconds with a total period of 30 seconds. 3. Number of consecutive 2A rate discharges while in 30V mode and recommended charges at 25±5°C until the battery reaches 80% of initial capacity.	

Features

- Flexible dual mode output voltage
- SmartCircuit Technology - communication with host and charge equipment
- Accurate state-of-charge display for each side of the battery
- Rugged, tough case construction can handle severe environments
- High energy density solution in the Ultralife UBI-2590 family




Applications

- Rugged, portable electronics
- Robotics / AUVs / UUVs

Optional Accessories

- UCH0056: Smart Desktop Charger
- CH0002: COTS Desktop Charger
- UCH0053: 6-bay Charger
- UCH0054: 2-bay Charger
- MRC135A: Single Unit Solar Charger
- MRC-143A: 3-Unit Solar Charger
- UKT0011: Portable Battery System
- CA0003: Vehicle Adapter
- CA0006: 15/30V, 2 Conductor Cable
- CA0007: 15/30V 2 Conductor Cable
- CA0008: 15/30V, 4 Conductor Cable
- UCA0039: Shielded Smart Cable
- UCA0114: Low Profile Smart Cable

Dimensions

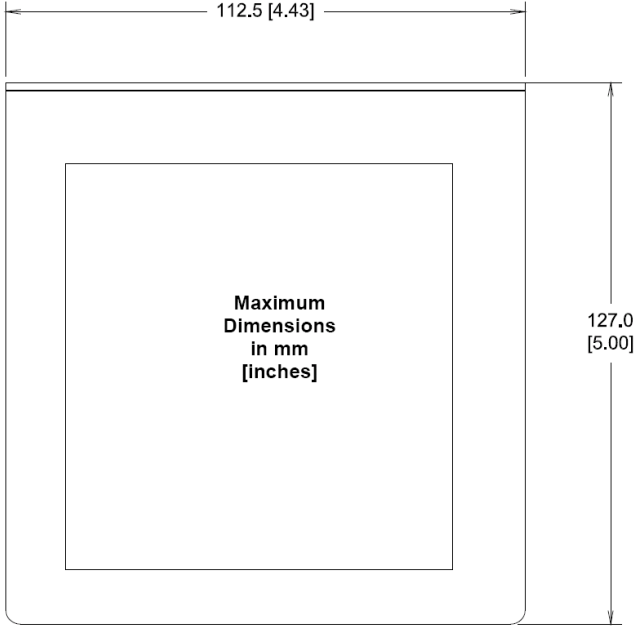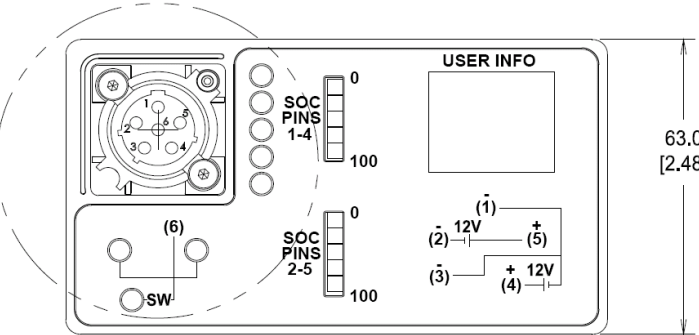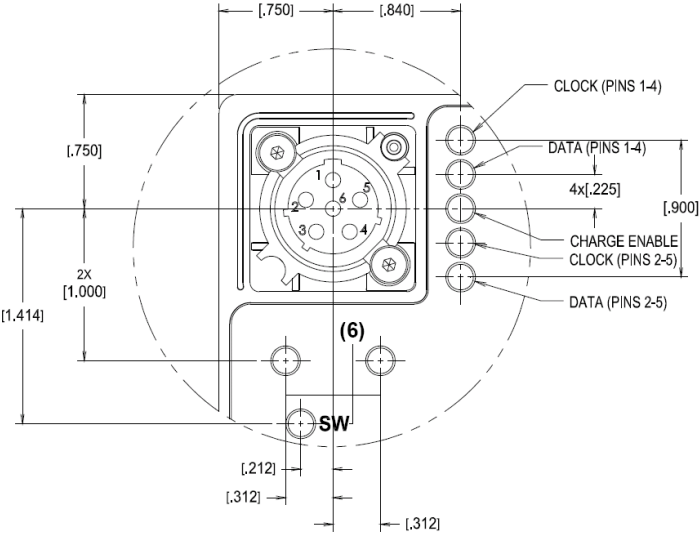

Performance Graphs

