

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20



ALL RIGHTS RESERVED.

LOC
ES

DIST
-




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	DI	REVISED PER ECO-11-005033	16APR2011	RK	HMR

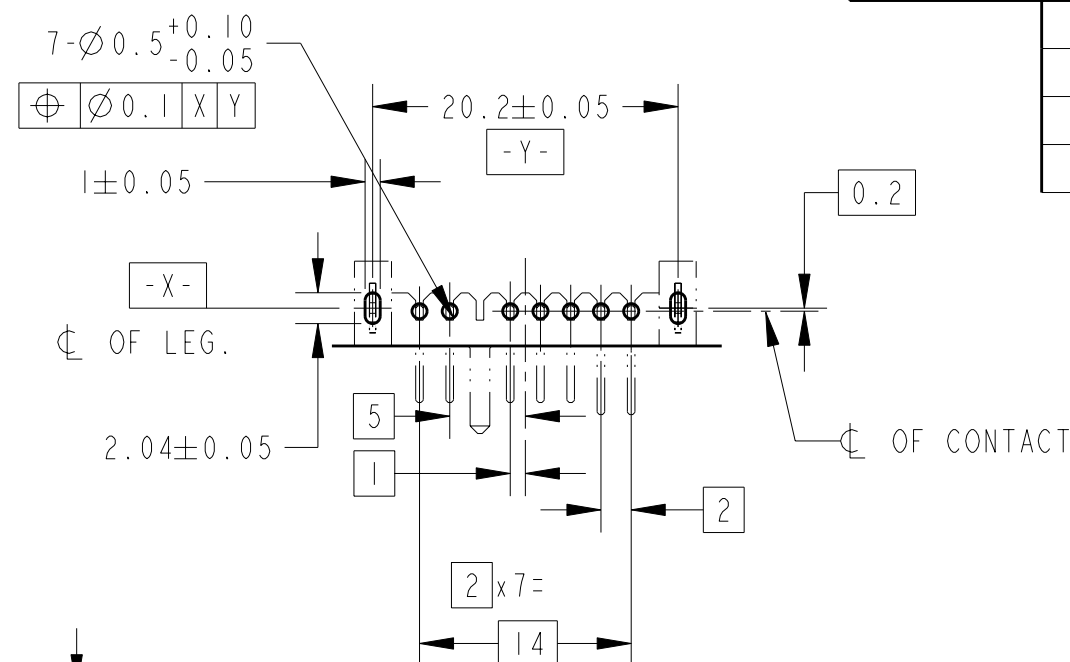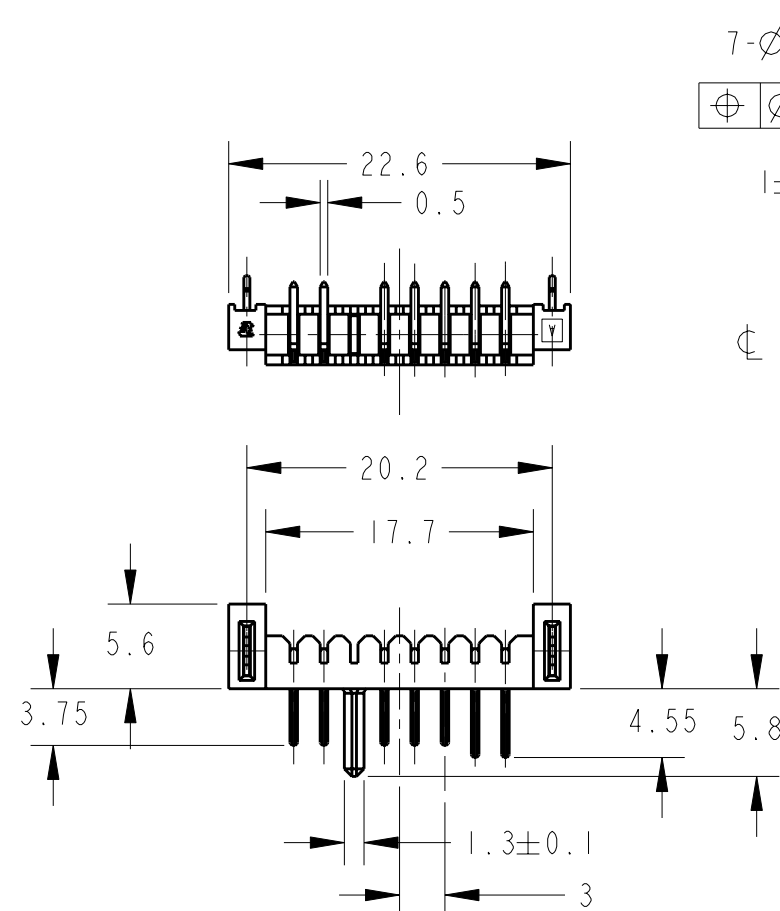

- 1 MATERIAL
CONTACT: COPPER ALLOY
HOUSING: THERMOPLASTIC RESIN UL94V-0 BLACK
RETENTION LEG: COPPER ALLOY
- 2 FINISH
CONTACT: NICKEL ALL OVER UNDER PLATING,
GOLD PLATING AT CONTACT AREA,
GOLD FLASH PLATING AT LEAD AREA,
RETENTION LEG: NICKEL ALL OVER UNDER PLATING,
TIN PLATING.

REFERENCE P.C BOARD LAYOUT
P.C.BOARD THK. 0.8~1.2
(VIEW FROM CONNECTOR MOUNTING SIDE)

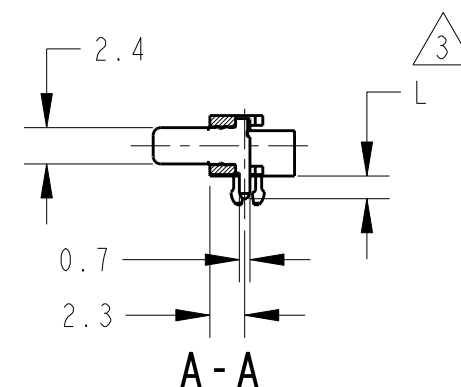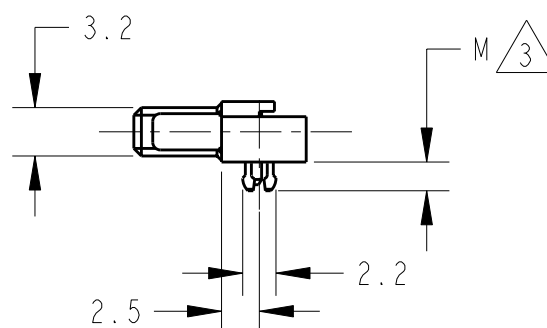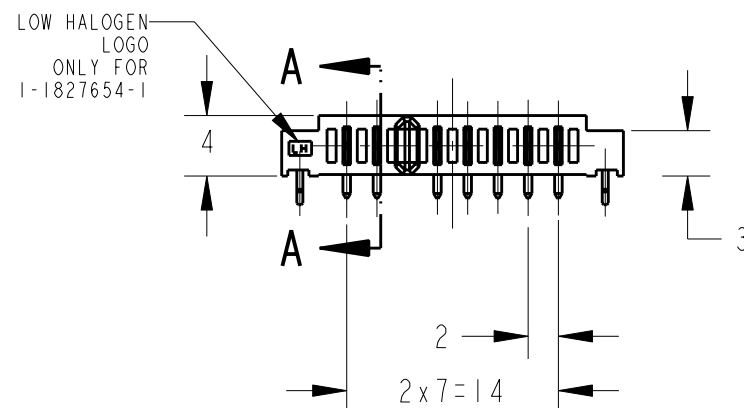


1827654-1, 1-1827654-1: AS SHOWN

THERMOPLASTIC RESIN(LOW HALOGEN)	1.9	1.5	1-1827654-1
THERMOPLASTIC RESIN	2.6	2.1	1827654-2
THERMOPLASTIC RESIN	1.9	1.5	1827654-1
HOUSING MATERIAL	DIM "M"	DIM "L"	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



MATERIAL SEE NOTE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
±0.3
0 PLC ±
1 PLC ±0.1
2 PLC ±0.01
3 PLC ±0.001
4 PLC ±0.0001
ANGLES ±3°

FINISH SEE NOTE

DWN T.KATANO 04JUL05

CHK T.KIMURA 04JUL05

APVD T.KIMURA 04JUL05

PRODUCT SPEC

108-78292

APPLICATION SPEC

-

WEIGHT 1.0g

CUSTOMER DRAWING




TE Connectivity

NAME
PLUG ASSEMBLY 7POS.
2mm PITCH BATTERY CONNECTOR


SIZE CAGE CODE DRAWING NO RESTRICTED TO

A3 00779 C-1827654

SCALE 2:1 SHEET 1 OF 2 REV DI

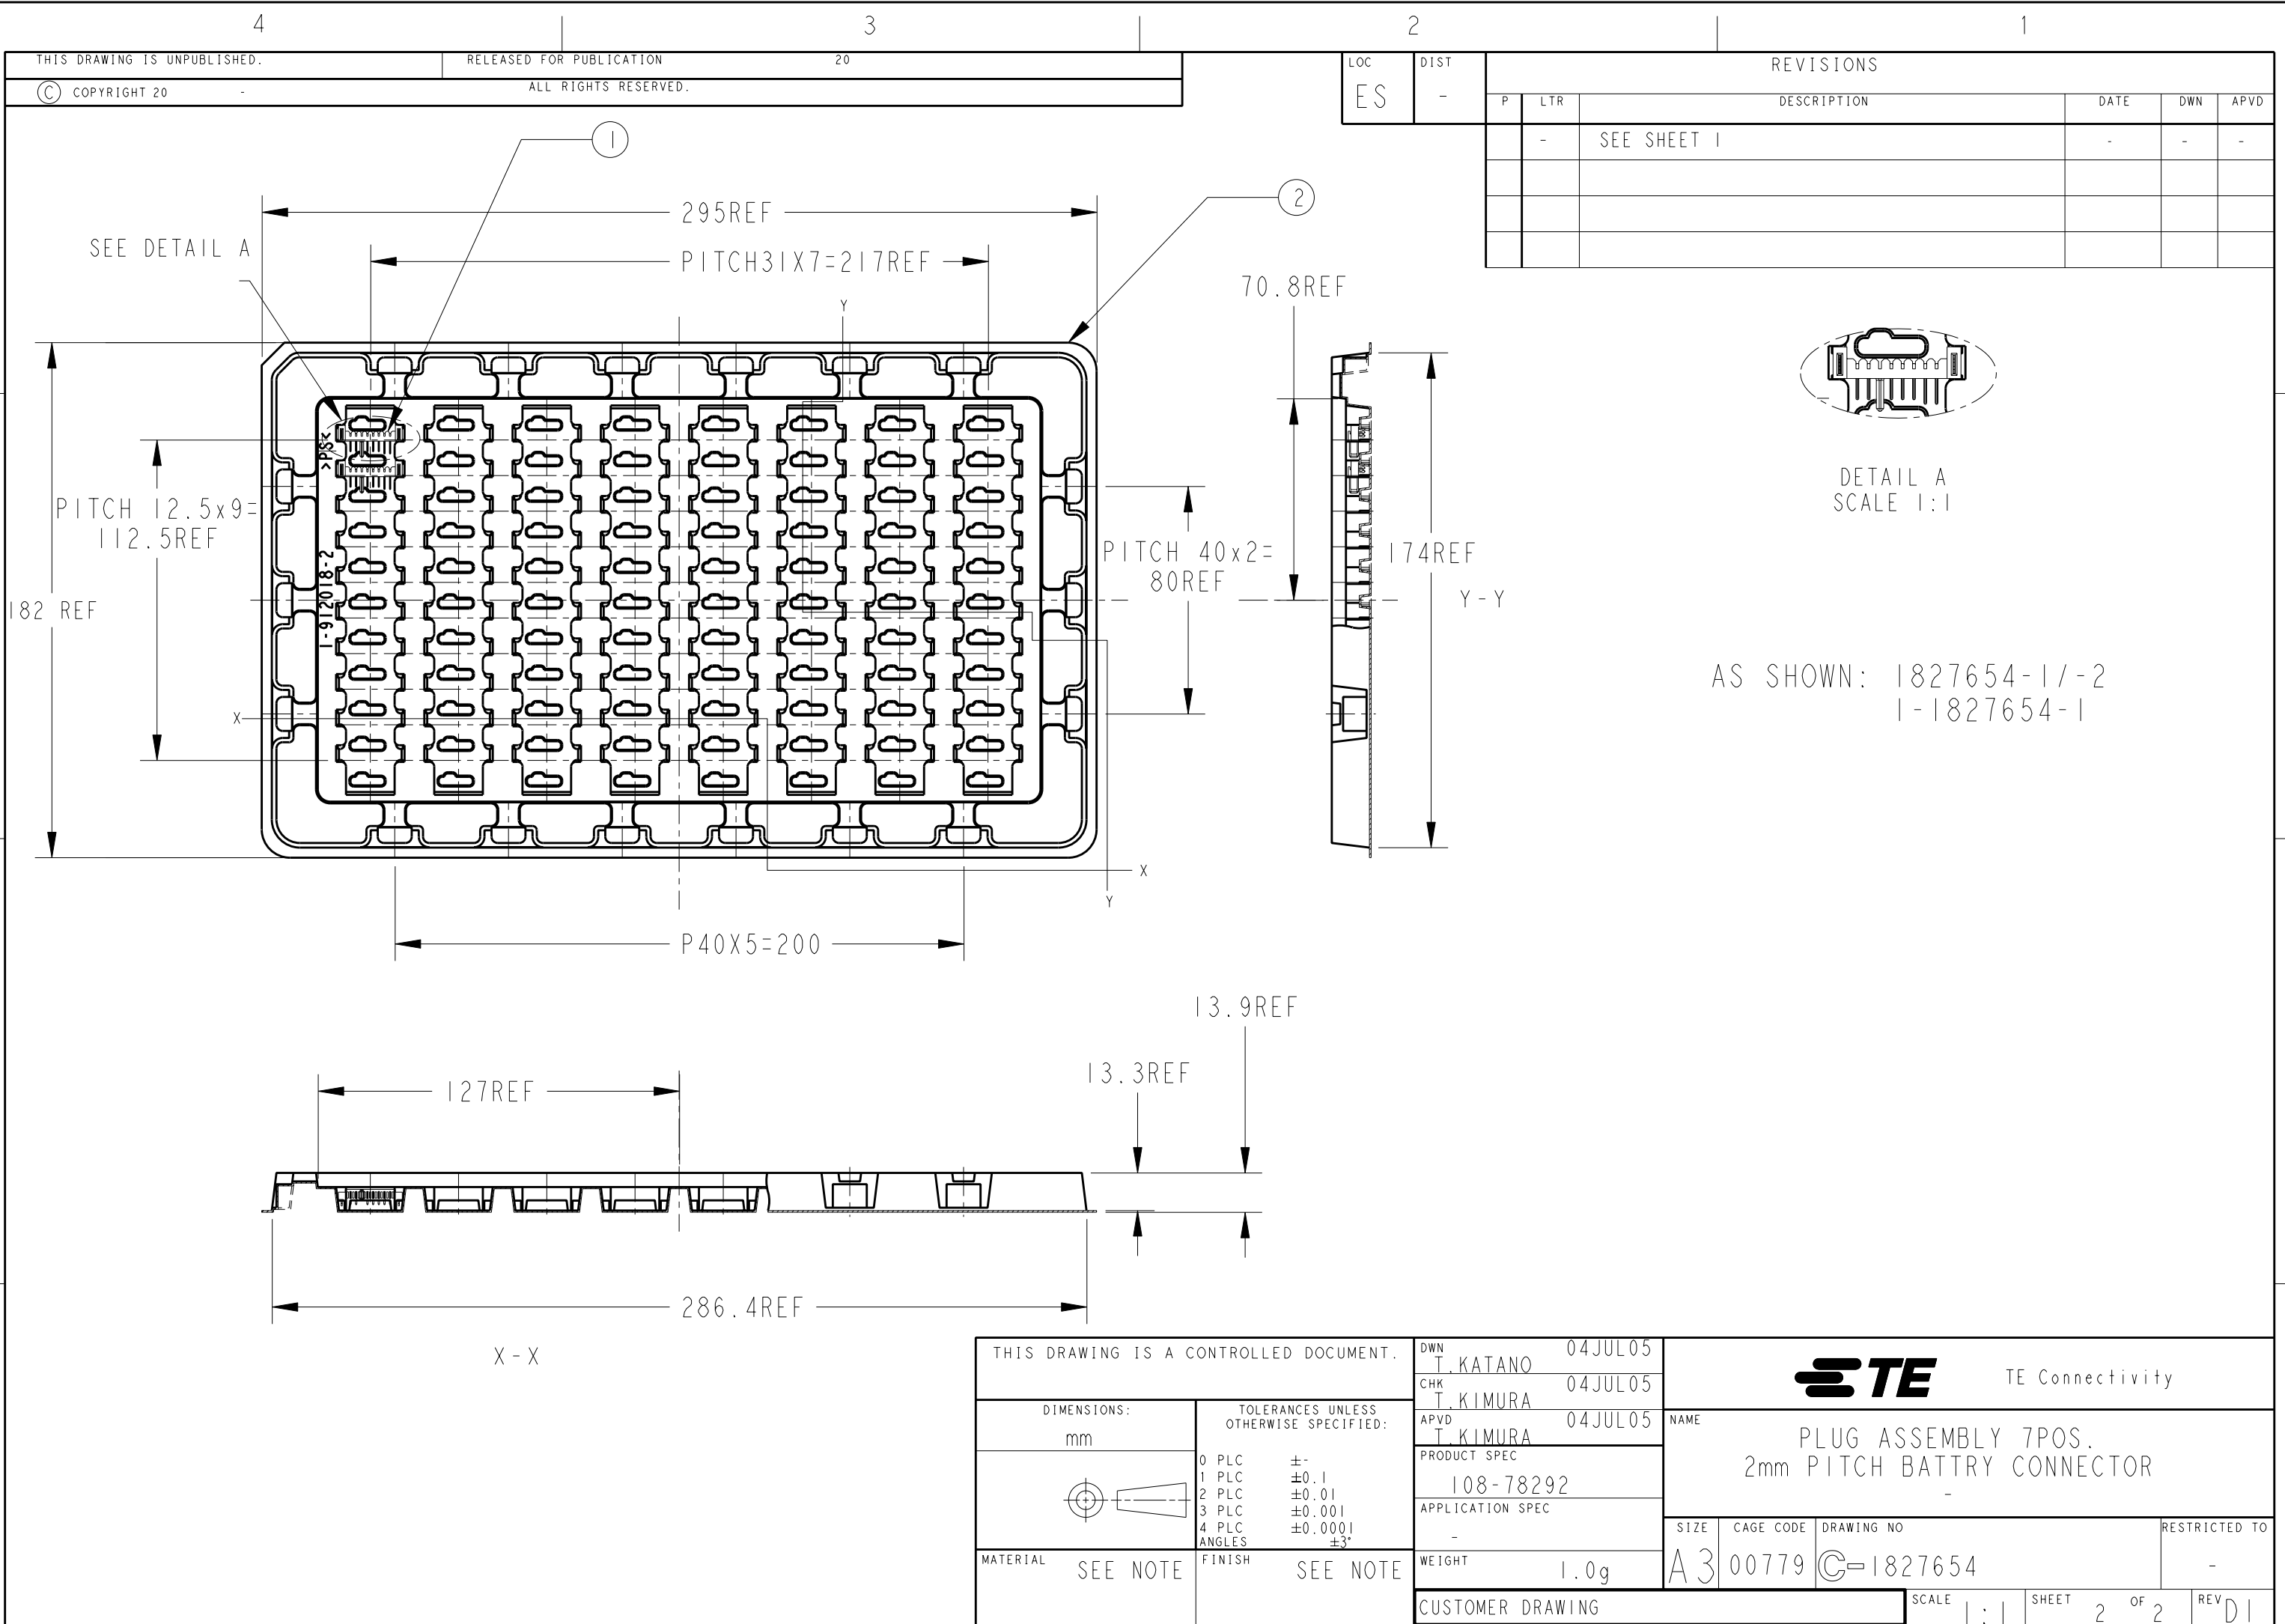

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	-		-	SEE SHEET I	-	-	-



DETAIL A
SCALE 1:1

AS SHOWN: 1827654-1/-2
1-1827654-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	T. KATANO	04JUL05	TE Connectivity		
		CHK	T. KIMURA	04JUL05			
		APVD	T. KIMURA	04JUL05	NAME		
		PRODUCT SPEC			PLUG ASSEMBLY 7POS.		
		APPLICATION SPEC			2mm PITCH BATTERY CONNECTOR		
		WEIGHT			RESTRICTED TO		
		1.0g			-		
		CUSTOMER DRAWING			SCALE		
					1:1		
					SHEET		
					2 OF 2		
					REV		
					D1		